

◆ ACCURA

Accura is a fundamental and budget friendly system window for those who are seeking a premium sliding within a budget. Highly recommended for projects such as residential building, hospitals and commercial spaces.


Accura comes with size limitation but offer maximum benefits for enhancing both interior and exterior aesthetics, It is customizable to meet your specific requirements.



2 Track Width 57 mm	3 Track Width 100 mm
Track Bottom Height 40 mm	Interlock Size 56 mm
Wind load 1.1 kpa	Noise Insulation 30 DB
Maximum Height 2000 mm	Maximum sash sq mt 2.1 sq mt

Glass Option

5 mm, 6 mm Clear Toughened Glass

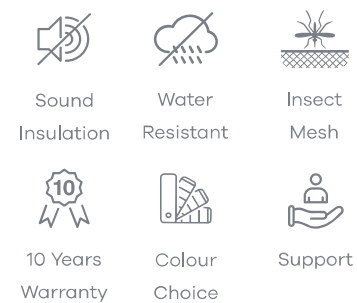

◆ ORICO

Orico is a versatile sliding system window that seamlessly blends traditional and contemporary design. Ideal for spaces with constraints, it is effortlessly operate with sash and rollers at the bottom, allowing smooth lateral movement. Easy to open and operate. The sash movement ensures enhance ventilation, The option of removable mosquito mesh without additional track is also available. Resistant to noise, dust, heat, and pollution. It is lightweight yet robust and durable, Its track incorporates a special drainage system, preventing water accumulation



2 Track Width 65 mm	3 Track Width 102 mm
Track Bottom Height 46 mm	Interlock Size 65 mm
Wind load 1.3 kpa	Noise Insulation 38 DB
Maximum Height 2200 mm	Maximum sash sq mt 2.1 sq mt

Glass Option

5 mm Toughened / 8 mm / 11.52 mm Lam / 16 mm DGU



◆ JERRONIC

Jerronic is a versatile sliding door system window that seamlessly combines traditional and contemporary design. Complementing the Orico with its traditional aesthetics, This door series facilitates the creation of new and exciting outdoor and indoor spaces, It boasts smooth and easy sliding and the multi point locking system ensures easy operation and complete security. The sash movement guarantees enhanced ventilation making it easy to open and operate, Resistant to noise, dust, heat and pollution. It features a track with a special rainwater drainage system to prevent water accumulation.



2 Track Width

85 mm

3 Track Width

133 mm

Track Bottom Height

45 mm

Interlock Size

86 mm

Wind load

1.5 kpa

Noise Insulation

38 DB

Maximum Height

3000 mm

Maximum sash sq mt

4.8 sq mt

Glass Option

5 mm Toughened / 8 mm / 11.52 mm Lam / 20 mm DGU / 24.52 mm DGU+ Lam



Sound
Insulation



Water
Resistant



Insect
Mesh



10 Years
Warranty



Colour
Choice



Support

◆ SUPRO SLIM

Supro slim stand out as a slim section featuring a blend of traditional and contemporary sliding system window design. Crafted with new innovative technology and developed for everyone. 20 mm sleek sightline enhance the outer view. It's at aesthetic transforms the overall appearance of the house. Its track features a dedicated drainage system, mitigating the risk of water buildup.



2 Track Width

65 mm

3 Track Width

102 mm

Track Bottom Height

46 mm

Interlock Size

20 mm

Wind load

1.3 kpa

Noise Insulation

35 DB

Maximum Height

2400 mm

Maximum sash sq mt

3.9 sq mt

Glass Option

5 mm Toughened Glass / 8 mm / 11.52 mm Lam / 16 mm DGU



Sound
Insulation



Water
Resistant



Insect
Mesh



10 Years
Warranty



Colour
Choice



Support

◆ NARROW SLIM

Narrow slim represent a new budget friendly slim sliding door series. Initiative offering a large view with its slim interlock design. It complements with supro series. Enhancing both interior and exterior aesthetics. This door series features smooth sliding section and can be customized according to client requirement. The track includes a specialized drainage system to avert the buildup of water

◆ ITALIO SLIM

Introducing Italo Slim, the epitome of luxury in aluminum windows, boasting an ultra-sleek 20 mm sightline and advanced features. This meticulously designed window not only exudes opulence but also incorporates a rain seepage provision. Crafted with precision, Italo Slim is a symbol of sophistication, offering resistance against noise, dust, heat, and pollution. Designed to complement the prestigious Vetro Slim. The main feature is SS track rail, Which provide more strength.



2 Track Width

85 mm

3 Track Width

133 mm

Track Bottom Height

45 mm

Interlock Size

20 mm

Wind load

1.5 kpa

Noise Insulation

35 DB

Maximum Height

3300 mm

Maximum sash sq mt

5.25 sq mt

Glass Option

5 mm Toughened / 8 mm / 11.52 mm Lam / 20 mm DGU / 24.52 mm DGU+ Lam



Sound
Insulation



Water
Resistant



Insect
Mesh



10 Years
Warranty



Colour
Choice



Support

2 Track Width

85 mm

3 Track Width

126 mm

Track Bottom Height

40 mm

Interlock Size

20 mm

Wind load

1.5 kpa

Noise Insulation

35 DB

Maximum Height

2700 mm

Maximum sash sq mt

4.5 sq mt

Glass Option

5 mm Toughened / 8 mm / 11.52 mm Lam / 20 mm DGU



Sound
Insulation



Water
Resistant



Insect
Mesh



10 Years
Warranty



Colour
Choice



Support

◆ VETRO SLIM

Vetro slim features super slim sightline, ensuring more glazing and less frame are visible. Vetro slim sliding doors offer great versatility, allowing you the freedom to create the perfect configuration for your home while promoting energy efficiency. They enhance the interior and exterior views of your home.

A specially devised drainage system, integrated seamlessly into the track's design, averts the occurrence of water pooling. SS track rail provide more stability.



◆ MONO SLIM

Mono slim introduces a new features for slim sliding window systems, offering significant comfort to everyone. It plays a key role in regulating the indoor climate and noticeably reducing electricity demand. Mono slim serves as a connector between the living room, garden, balcony and terrace providing a wide and expansive view of the outside. It's track incorporates a special rain water drainage-system to prevent water accumulation, and it also features a concealed drainage system for added convenience.



2 Track Width

101 mm

3 Track Width

150 mm

Track Bottom Height

48 mm

Interlock Size

20 mm

Wind load

1.8 kpa

Noise Insulation

35 DB

Maximum Height

3600 mm

Maximum sash sq mt

6.12 sq mt

Glass Option

8 mm Toughened / 13.52 mm Lam / 22 mm DGU / 27.52 mm DGU+Lam



Sound
Insulation



Water
Resistant



Insect
Mesh



10 Years
Warranty



Colour
Choice



Support

2 Track Width

116 mm

3 Track Width

172 mm

Track Bottom Height

45 mm

Interlock Size

20 mm

Wind load

1.8 kpa

Noise Insulation

40 DB

Maximum Height

3200 mm

Maximum sash sq mt

4.8 sq mt

Glass Option

8 mm Toughened / 12 mm Toughened / 13.52 mm Lam / 24 mm DGU



Sound
Insulation



Water
Resistant



Pleated
Mesh



10 Years
Warranty



Colour
Choice



Support

◆ ULTRA SLIM

Introducing Ultra Slim, the zenith of super-premium excellence in aluminum windows, featuring an extraordinary 18mm sightline—an achievement realized by only a select few companies over the world. Beyond its impeccable design, this window sets a new standard with a rain seepage provision and robust resistance to noise, dust, heat, and pollution. What truly distinguishes Ultra Slim is its unique ability to be submerged, rendering the profile invisible and offering an unparalleled aesthetic experience. Elevate your space with the pinnacle of sophistication and performance—Ultra Slim stands as a testament to cutting-edge innovation in the world of super premium aluminum system.



2 Track Width

142 mm

3 Track Width

222 mm

Track Bottom Height

45 mm

Interlock Size

18 mm

Wind load

2.5 kpa

Noise Insulation

40 DB

Maximum Height

4800 mm

Maximum sash sq mt

7.36 sq mt

Glass Option

12 mm Toughened / 13.52 mm Lam / 36 mm DGU / 37.52 mm DGU+Lam



Sound
Insulation



Water
Resistant



Pleated
Mesh



10 Years
Warranty



Colour
Choice



Support

◆ ROMICA WINDOW

Romica windows are tailored to meet client needs, offering the option of inside or outside opening based on requirements. They provide a superior air-tight seal and enhanced sound insulation. More suitable for small space with bigger opening. The Romica window is designed to enable perfect lighting for rooms and foster a connection with the external environment. Specifically crafted for small spaces in rooms and kitchens, it serves as an ideal solution for residential flats, bungalows, hotels, and corporate offices.



Outer Width

40 mm

Outer Height

38 mm

Sash width

54 mm

Wind load

1.5 kpa

Maximum width

700 mm

Noise Insulation

42 DB

Maximum Height

1500 mm

Maximum sash sq mt

1.5 sq mt

Glass Option

5 mm Toughened / 8 mm / 11.52 mm Lam / 20 mm DGU



Sound
Insulation



Water
Resistant



Pleated
Mesh



10 Years
Warranty



Colour
Choice



Support

◆ CIVICO DOOR

Civico doors are designed to be customized according to client needs, offering the flexibility of inside or outside opening based on specific requirements. They boast a superior air-tight seal and enhanced sound insulation, making them an ideal solution for various settings, hotels, and corporate offices.



◆ MENTO DOOR

Mento Door stands out as a unique product from Corinzo, with its design intricately aligned with load and performance criteria. Each feature of the Mento is interconnected, enhancing its overall specifications. Unlike other casement sections, Mento provides flexibility in making changes that might be challenging in terms of cost and design in other options. It serves as a solution to resolve queries and offers a balance between customization and performance.



Outer Width

40 mm

Outer Height

38 mm

Sash width

72 mm

Wind load

1.3 kpa

Maximum width

914 mm

Noise Insulation

35 DB

Maximum Height


2400 mm

Maximum sash sq mt

2.16 sq mt

Glass Option

5 mm Toughened / 8 mm / 11.52 mm Lam / 20 mm DGU

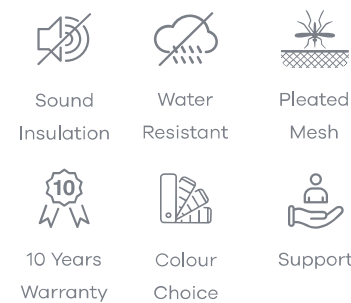

Outer Width

50 mm

Outer Height

46 mm

Sash width

93 mm

Wind load

1.5 kpa

Maximum width

900 mm

Noise Insulation

38 DB

Maximum Height


3300 mm

Maximum sash sq mt

2.48 sq mt

Glass Option

5 mm Toughened / 8 mm / 11.52 mm Lam / 20 mm DGU / 24 mm DGU

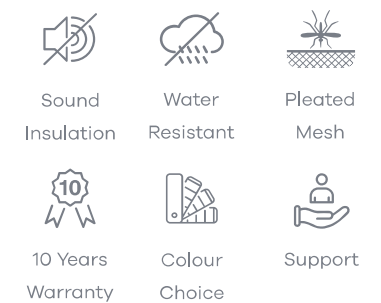

◆ SOFICA SLIDING & FOLDING DOOR

Sofica is a contemporary and space efficient solution that seamlessly connects indoor and outdoor spaces. This innovative design allows panels to neatly stack, maximizing space and creating wide, unobstructed opening with customized configurations, smooth operation, and energy efficient features. SFD offers security, durability, and low maintenance making them a practical and stylish choice for modern living.



Track Top

73 mm

Track Vertical

73 mm

Outer Height

32 mm

Wind Load

1.5 kpa

Noise Insulation

35 DB

Maximum Height

3000 mm

Maximum width

762 mm

Maximum sash sq mt

1.85 sq mt

Glass Option

5 mm Toughened / 8 mm / 11.52 mm Lam / 20 mm DGU



Sound
Insulation



Water
Resistant



Pleated
Mesh



10 Years
Warranty



Colour
Choice



Support

◆ CURTAIN WALL

Curtain wall is an innovative architectural element. It is an outer covering of a building in which the outer walls are nonstructural but are attached to the building Structure and used to keep out of weather. The use of the glass as the curtain wall has the advantage of allowing natural light to penetrate Deeper within the premises. It is air and water resistance. This abundance of natural illumination creates a sense of openness and spaciousness, enhancing the visual appeal and reducing reliance on artificial lighting.



Outer Width

65 mm

Outer height

45 mm

Wind load

1.5 kpa

Noise Insulation

38 DB

Glass Option

8 mm Toughened / 11.52 mm Lam / 20 mm DGU /
24 mm DGU



Sound
Insulation



Water
Resistant



Pleated
Mesh




10 Years
Warranty



Colour
Choice



Support

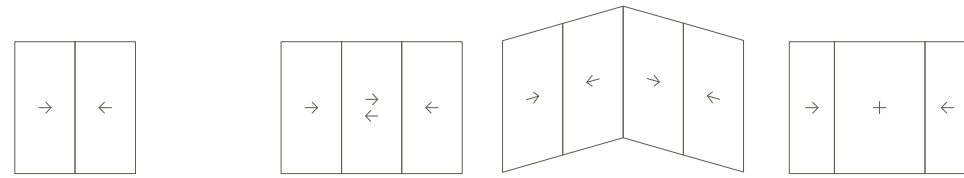

2 Track 2 Sash

3 Track 3 Sash

2 Track 2 Sash Corner Open


1 x 2 x 1 x



2 Track 4 Sash

3 Track 6 Sash

3 Track 3 Sash Corner Open




2 Track 2 Sash + 1 Slim Mesh

2 Track 4 Sash + 2 Slim Mesh

3 Track 3 Sash + 1 Slim Mesh

3 Track 1x + 2x + 1x + 2 Mesh

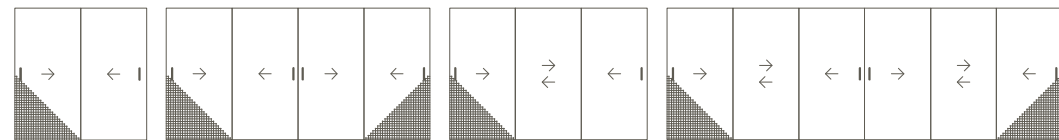


3 Track 2 Sash + 1 Mesh

3 Track 4 Sash + 2 Mesh

3 Track 3 Sash + 1 Mesh

3 Track 6 Sash + 2 Mesh

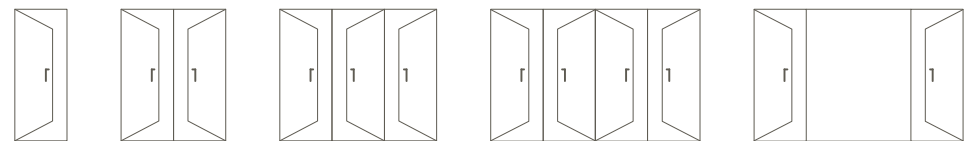


Side Open 1 Sash

Side Open 2 Sash

Side Open 3 Sash

Side Open 4 Sash

Side Open 2 Sash + 1 Fix




Tilt and lurch

Ventilation Option

Ventilation Option

Ventilation Option


Ventilation Option

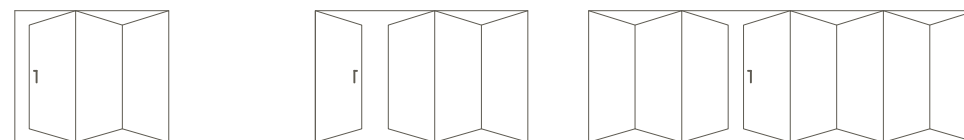

3 Sash

1+3 Sash

3+5 Sash

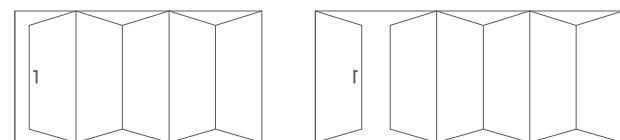

5 Sash

1+5 Sash